

Water meter inlet ball valve M/F




with fitting for meter

full bore PN 40

aluminium sealing butterfly handle

Tech drawings and tables



DN	Code	Ø	F	H	L	S	KG	PN	P/box
1/2" x 3/4"	025115000187	15	17	45	60	73,5	0,248	40	10
3/4" X1"	025115000230	20	17	52,5	73	87,5		40	10


RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 Grignasco (NO) - Italy
Tel +39 0163 4151 Fax + 39 0163 411914 E-Mail riv-vg@riv-vg.com Web <http://www.riv-vg.com>

Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397

Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034

Technical data


Art. 5098




Materials					
1	Body	Brass	Nickel-plated	CuZn40Pb2	UNI EN 12165
2	Body end	Brass	Nickel-plated	CuZn40Pb2	UNI EN 12165
3	Ball	Brass	Chrome-plated	CuZn40Pb2	UNI EN 12165
4	Seats	PTFE			ASTM D1457
5	Stem	Brass		CuZn39Pb3	UNI EN 12164
6	O-Ring	NBR			ASTM D2000
7	O-Ring	NBR			ASTM D2000
8	Butterfly handle	Aluminium	Green	GD-AISi12Cu2Fe	EN AB-46100
9	Screw	Steel	Zinc-plated		UNI EN 20898-1
10	Swivel nut	Brass	Nickel-plated	CuZn40Pb2	UNI EN 12165
11	Seeger	Stainless Steel		AISI 302	

Info_usage	General civil and industrial plant: water, heating and sanitary plants, waterworks, etc.
Info_junction	Female ISO 7/1Rp (parallel), Male ISO 7/1R (tapered), screwed ring ISO 228/1
Info_limits	-20°+110° (without liquid)
Info_notes	The max.working pressure (PN) means at a room temperature of about 23°C.

LoadLossChart

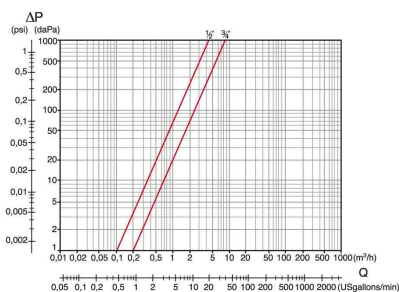

TemperaturePression

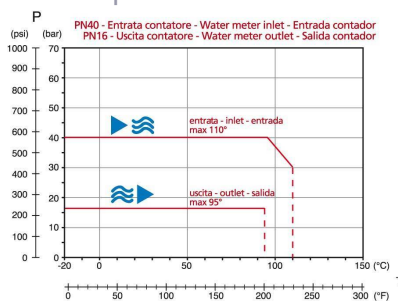

RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 Grignasco (NO) - Italy
Tel +39 0163 4151 Fax + 39 0163 411914 E-Mail riv-vg@riv-vg.com Web <http://www.riv-vg.com>

Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397

Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034

