




Water meter inlet ball valve F/F
with fitting for meter
full bore PN 40
tamperproof brass butterfly handle

Tech drawings and tables



DN	Code	Ø	F	H	L	S	CH	PN	P/box
1/2" x 3/4"	025130000187	15	17	51,5	53	68,5	25	40	10
3/4" x 1"	025130000230	20	17	58,5	58	81,5	31	40	10

RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 Grignasco (NO) - Italy
Tel +39 0163 4151 Fax + 39 0163 411914 E-Mail riv-vg@riv-vg.com Web <http://www.riv-vg.com>


Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397

Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034



Technical data

Art. 5130

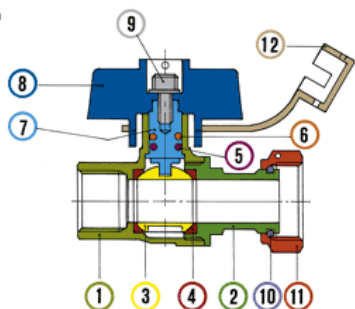

Materials

1	Body	Brass	CuZn40Pb2	UNI EN 12165
2	Body end	Brass	CuZn40Pb2	UNI EN 12165
3	Ball	Brass	Chrome-plated CuZn40Pb2	UNI EN 12165
4	Seats	PTFE		ASTM D1457
5	O-Ring	FKM		ASTM D2000
6	O-Ring	NBR		ASTM D2000
7	Stem	Brass	CuZn39Pb3	UNI EN 12164
8	Butterfly handle	Brass	CuZn40Pb2	UNI EN 12165
9	Screw	Steel	Zinc-plated	UNI EN 20898-1
10	Seeger	Stainless Steel		AISI 302
11	Swivel nut	Brass	CuZn40Pb2	UNI EN 12165
12	Cap	PVC		

Info_usage

Info_usage

General civil and industrial plant: water, heating and sanitary plants, waterworks, etc.

Info_junction

Female ISO 7/1Rp (parallel), Male ISO 7/1R (tapered), screwed ring ISO 228/1

Info_junction

Info_limits

-20°+110° (without liquid)


Info_limits

Info_notes


Info_notes

The max.working pressure (PN) means at a room temperature of about 23°C.

LoadLossChart

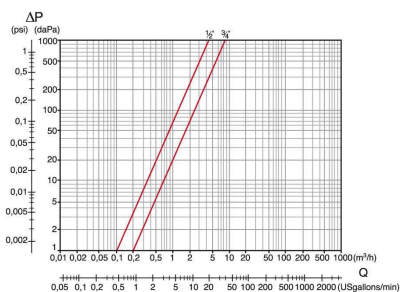

TemperaturePression

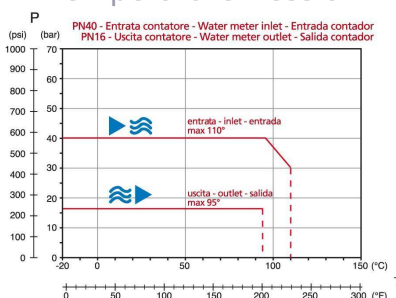

RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 Grignasco (NO) - Italy

Tel +39 0163 4151 Fax + 39 0163 411914 E-Mail riv-vg@riv-vg.com Web <http://www.riv-vg.com>

Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397

Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034

