




Ball valve M/F

full bore PN 40

tamperproof brass butterfly handle

## Tech drawings and tables



DN	Code	Ø	F	H	L	S	CH	KG	PN	P/box
1/2"	025055000004	15	16	51	53	66	25	0,25	64	10
3/4"	025055000005	20	17,5	58	58	76	31	0,41	40	10
1"	025055000007	25	21	63	58	91	38	0,62	40	10

## Approvals



WRAS

United Kingdom

RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 Grignasco (NO) - Italy  
 Tel +39 0163 4151 Fax + 39 0163 411914 E-Mail riv-vg@riv-vg.com Web <http://www.riv-vg.com>


Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397

Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034



## Technical data

A.rt. 5050

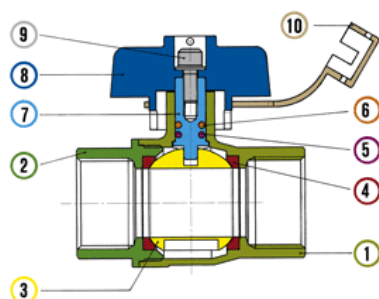

### Materials

1	Body	Brass	Nickel-plated	CuZn40Pb2	UNI EN 12165
2	Body end	Brass	Nickel-plated	CuZn40Pb2	UNI EN 12165
3	Ball	Brass	Chrome-plated	CuZn40Pb2	CuZn40Pb2 UNI EN 12165
4	Seats	P.T.F.E.			ASTM D1457
5	O-Ring	FKM			ASTM D2000
6	O-Ring	NBR			ASTM D2000
7	Stem	Brass		CuZn39Pb3	UNI EN 12164
8	Butterfly handle	Brass		CuZn40Pb2	UNI EN 12165
9	Screw	Brass		CuZn39Pb3	UNI EN 12164
10	Cap	PVC			

Info_usage	General civil and industrial plant: water, heating and sanitary plants, waterworks, pneumatic, hydraulics, steam, irrigation, etc.
Info_junction	Riv 5050 - 5055 - 5060 - 5065: F=ISO 7/1Rp (parallel) M=ISO 7/1R (tapered) Riv 5040 - 5045: ISO 228/1
Info_limits	Riv 5050 - 5055 - 5060 - 5065: -20°+150° (without liquid) Riv 5040 - 5045: -20°+110 (without liquid)
Info_notes	The max.working pressure (PN) means at a room temperature of about 23°C.

RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 Grignasco (NO) - Italy  
Tel +39 0163 4151 Fax + 39 0163 411914 E-Mail riv-vg@riv-vg.com Web <http://www.riv-vg.com>

Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397

Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034

